

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau


## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H01Q 1/24, 1/10</b>	<b>A1</b>	(11) International Publication Number: <b>WO 00/05781</b> (43) International Publication Date: 3 February 2000 (03.02.00)
(21) International Application Number: PCT/SE99/01287 (22) International Filing Date: 16 July 1999 (16.07.99) (30) Priority Data: 9802617-2 24 July 1998 (24.07.98) SE (71) Applicant (for all designated States except US): ALLGON AB [SE/SE]; P.O. Box 500, S-184 25 Åkersberga (SE). (72) Inventor; and (75) Inventor/Applicant (for US only): WIDFELDT, Johan [SE/SE]; Scheelegatan 28, S-112 28 Stockholm (SE). (74) Agent: AXEL EHRNERS PATENTBYRÅ AB; Box 103 16, Gumshomsgatan 7, S-100 55 Stockholm (SE).	(81) Designated States: AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

(54) Title: AN ANTENNA DEVICE

## (57) Abstract

An antenna device (1) for portable communication equipment and comprising an extendable elongated antenna element (2) which at its lower part comprises first and second contact surfaces and which is slidable inside a casing (5) between an extended position and a retracted position. The first and second contact surfaces are arranged for engagement with an inner surface of the casing (5), and a third contact surface (32) is arranged for engagement with the elongated antenna element (2). The contact surfaces are arranged so as to create a spring force in the elongated antenna element so as to achieve mechanical locking in the extended position.

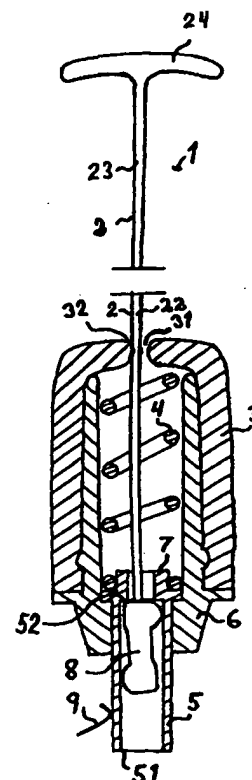

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CJ	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

**AN ANTENNA DEVICE****FIELD AND BACKGROUND OF THE INVENTION**

5 The invention relates to an antenna device for transmitting and receiving RF-signals from and to a radio communication device, comprising: an extendable elongated flexible antenna element having first and second ends, whereof the first end has a first end portion; a casing through which said antenna  
10 element is slidable between an extended position, where the first end portion is mechanically locked in the casing, and a retracted position; and, a first opening in a first end of the casing through which the first end portion of said antenna element can be introduced, and a second opening in a second  
15 end of the casing through which the antenna element is slidable. Specifically, it relates to an antenna device for a mobile radio communication device, e.g. a hand-portable telephone.

20 Such an antenna device is previously known from WO 94/28593, wherein an antenna rod at its lower region is provided with a rigid stopper element which, in the extended position, co-operates with a resilient sleeve member so as to obtain a locking force between these parts.

25 The prior art device is well functioning, however, relatively space-demanding in the axial direction, since the sleeve construction necessarily have relatively large axial dimensions and because the end portion of the stopper element  
30 appearing on the outside of the sleeve in the extended position. Further, a device based on the prior art solution includes several separate details such as a sleeve, a spring ring for the sleeve, a screw portion and a stopper element,

resulting in correspondingly high costs for manufacture, on the one hand of the separate elements and on the other hand for assembly of the elements. The use of several elements also results in accumulated and more widely spread tolerances.

- 5 Further, the use of springs and separate details including springs put hard requirements on the design and the materials, in order to achieve long durability.

#### SUMMARY OF THE INVENTION

10

It is an object of this invention to provide an antenna device of the above mentioned type wherein the prior art problems are eliminated or at least reduced.

- 15 This is achieved by that: the first end portion is provided with first and second contact surfaces for engagement with an inner surface of the casing; the first and second contact surfaces are axially separated in relation to a longitudinal axis of the elongated antenna element and facing in different
- 20 directions; a third contact surface is arranged for engagement with the elongated antenna element between the first end portion and the second end; and, the contact surfaces, the casing and the elongated antenna element are arranged so as to bend the elongated antenna element to create a spring force in
- 25 the elongated antenna element in order to achieve said mechanical locking in the extended position.

- This way the antenna device contains only one movable part, the elongated antenna element, thus reducing costs for
- 30 production and assembly.

Further important features of the invention are reduced weight, and requirement only for a small space.

By the arrangement of contact surfaces in the end portion of the elongated antenna element an antenna device is achieved which can be produced in a simple process at reduced costs, compared to prior art devices. When the contact surfaces are provided on an enlarged portion, the enlarged portion can be manufactured by moulding (e.g. press moulding or metal injection moulding), which contributes to the cost reduction.

By using a portion of the elongated antenna element as a spring for obtaining the stopping or retaining function in extended position, a longer spring length than in prior art devices can be achieved. This is very advantageous, since constructions with long spring lengths are not so sensitive, and the stop or retaining force do not depend on high tolerances, and they are therefore very stable. For prior art constructions, having short spring lengths, the contrary is valid. They are more sensitive, and the stop or retaining force more depends on high tolerances, and there is a risk for unstability.

By the introduction of a bending force in the elongated antenna element, rattling (i.e. vibrations in the antenna element due to external forces) is avoided or at least reduced.

By the arrangement of a constriction or shoulder at the second end of the casing, the space required can be reduced since no stopper element outside the casing is needed.

By the contact surface being convex or rounded, i.e. curved in two perpendicular directions, it is assured that the pulling force variation is minimized and this provision also results

in a smooth movement when the extended position is established.

By the arrangement of an antenna element (e.g. a helical  
5 radiator or a meandering radiator) at least partially  
surrounding the elongated antenna element, it is achieved an  
improved antenna device, with good performance in stand-by  
mode when the elongated antenna element is in the retracted  
position, and with good performance in call mode when the  
10 elongated antenna element is in the extended position.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a diagrammatic partially sectional view of an  
15 antenna device, in extended position, according to a first  
embodiment of the invention.

Figure 2 is an enlarged diagrammatic side view of an enlarged  
portion of the antenna rod in Figure 1.

20

Figure 3 is an enlarged perspective view of an enlarged  
portion of the antenna rod in Figure 1.

Figure 4 is a diagrammatic partially sectional view of an  
25 antenna device, in retracted position, according to the first  
embodiment of the invention.

Figure 5 is a diagrammatic partially sectional view of an  
antenna device, in extended position, according to a second  
30 embodiment of the invention.

Figure 6 is an enlarged diagrammatic side view of an enlarged  
portion of the antenna rod in Figure 5.

Figure 7 is a diagrammatic partially sectional view of an antenna device, in extended position, according to a third embodiment of the invention.

5

Figure 8 is an enlarged diagrammatic side view of an enlarged portion of the antenna rod in Figure 7.

Figure 9 is a diagrammatic partially sectional view of an antenna device, in extended position, according to a fourth embodiment of the invention.

10

Figure 10 is a diagrammatic partially sectional view of an antenna device, in extended position, according to a fifth embodiment of the invention.

15

Figure 11 shows a radiating structure included in the antenna device of Figure 10.

Figure 12 is a diagrammatic partial cross sectional view of a guided antenna rod, according to a sixth embodiment of the invention.

20

## 25 DESCRIPTION OF PREFERRED EMBODIMENTS

The embodiment of Fig. 1 concerns an antenna device 1 for a mobile radio communication device, wherein an extendible antenna rod 2 is slidable inside a cover 3 of a helical radiator 4. At the bottom part of cover 3 a casing 5 is arranged and partly enclosed by a base member 6, which serves as a support onto which the cover 3 is mounted and in which the casing 5 is fastened. On the top of the casing 5 is a

30

tubular member 7 provided, which serves as a retainer for the coil (helical radiator) 4. When the casing 5 (and also the tubular member 7) is made of a conductive material, RF energy is fed via this (those) between the coil and the transceiver circuits of the radio communication device. In the case the material of the casing 5 is non-conductive, the coil is fed via a feed portion and separate connection to the transceiver circuits of the radio communication device (not shown).

10 The antenna rod 2 is an antenna element including an elongated radiating element 22, which may be made of nickel-titanium. The radiating element 22 is covered with an insulating and protecting layer except for a lower portion of the radiating element 22 which is to be introduced into a member forming an enlarged portion, as explained below. A top portion of the antenna rod 2 may be made of an insulating material 23, so that when in its retracted position, the radiating element 22 is not surrounded by the coil 4 (Figure 3).

20 The antenna rod 2 is at its lower end provided with an enlarged portion 8. The enlarged portion 8 includes at each of its both ends a protruding part, having a curved surface 81, 82. The two curved surfaces 81, 82 face in different directions in relation to a longitudinal axis 21 of the elongated antenna element 2, preferably with a difference of 180°.

As seen in Figure 2, the enlarged portion 8 is a separate member which is provided with a through bore 83 for receiving the lower portion of the antenna rod 2 (and of the radiating element 22). The bore 83 is located in the centre of the enlarged portion 8, and the enlarged portion 8 is symmetric,



so it has the same appearance and function when it is rotated 180° in the plane of the paper. The enlarged portion 8, is preferably made of zinc, which permits zinc metal moulding for its manufacture. It can also be produced by metal injection moulding (MIM). The enlarged portion 8 is secured to the antenna rod 2 by pressing, impressing in the enlarged portion 8, soldering, gluing or similar. Due to its symmetry the mounting of the enlarged portion 8 is simplified, since the end of the antenna rod 2 can be introduced into the bore 83 from either of its both openings, while the enlarged portion 8 will have the same form. Orientation of the separate member constituting the enlarged portion 8 is therefore not necessary during the manufacture, and a complicated step in the manufacturing process is hereby eliminated.

15

In Figure 4 the antenna device is shown with the antenna rod 2 in its retracted position. The antenna rod 2 is moved to its extended position by pulling the knob 24, which also serves as a stopper for the retracted position. The antenna rod 2 then slides through the casing 5 and the cover 3, and exits through the opening 31. The opening 31 is circular, and exhibits a contact surface 32, which is annular. At the end of this movement the enlarged portion 8 will enter the casing 5 through the lower opening, first with the protruding part carrying the curved surface 81. The antenna rod 2, the contact surface 32, the protruding parts with their curved surfaces 81, 82, and the casing 5 are formed so that when the surface 82 enters the casing 5 it will contact the edge 51 and slide thereon until it slides on the inner surface of the casing 5, while the surface 81 slides on the inner surface of the casing 5 on the opposite side. When the surface 82 slides on the edge 51, the enlarged portion 8 is slightly rotated in the plane of

the paper, and the antenna rod 2 is moved towards the contact surface 32 on the cover 3 until they are in contact. The rotation continues until the surface 82 slides on the inner surface of the casing 5. Then the antenna rod 2 will be slightly curved due to the spring force created therein by the flexibility of the antenna rod 2 and the pressure on the three contact surfaces (whereof two are included in the surfaces 81 and 82). The forms and locations of the surfaces 32, 81 and 82 are selected to obtain the desired spring force in the antenna rod 2. The spring force and the friction between the contact surfaces and the surfaces sliding thereon cause a resistance when the antenna rod 2 is pulled out. Also a desired retaining or locking function arises, so that the antenna rod 2 will remain in its extended position until it is exerted to a certain external force for its retraction. Thus, the locking or retaining function is mechanical, especially frictional.

When the antenna rod 2 has reached the extended position the top 84 of the enlarged portion 8 contacts the surface 52, which is a surface of a shoulder or constriction in the upper end of the casing 5, and further movement in the extension direction is prevented. The surface 52 is planar with an annular shape and can be contacted by the top 84 of the enlarged portion 8 in many ways, depending on the shape of the top 84. The contact region where the surface 52 and the top 84 are in contact could e.g. be annular or annularly distributed.

As seen in Figure 3, each of the surfaces 81 and 82 is not only curved in a plane of the sliding movement but also in a plane perpendicular thereto, so as to form a convex surface. This curve shape is preferably conform with the inner surface of the casing 5, which preferably is circular cylindrical. The

surfaces 86 are preferably essentially planar, and preferably parallel with corresponding surfaces on the opposite side.

Since the radiating element 22 of the antenna rod 2 is made of a flexible wire or rod, and the enlarged portion 8 is formed as a rigid member, which is rigidly secured to the antenna rod 2, the spring action is carried out by the radiating element 22.

10 The casing 5 shown is tubular and has a circular cross section. However, it can be formed with another cross section, preferably essentially conform with the cross section of the enlarged portion 8, in order to provide guiding of the enlarged portion 8 and the antenna rod 2, so that they can not  
15 be rotated around their longitudinal axes (or axis of the bore). The casing 5 can e.g. have planar wall sections parallel to the plane of the paper for the drawings.

When the casing 5 is made of a conductive material, RF energy  
20 is fed between the antenna rod 2 and the transceiver circuits of the radio communication device via the casing 5. A contact member 9 establishes a conductive contact between a PCB (printed circuit board) of the transceiver circuits and the casing 5. The contact pressure on the contact surfaces of the  
25 enlarged portion 8 and the corresponding surfaces of the casing 5 are sufficient for conductive contact establishment. Since the enlarged portion 8 is attached to the radiating element 22 so that they are in good conductive contact, RF energy can thus be fed to and from the antenna rod 2.

30

In the case when the casing 5 is made of a non-conductive material, RF energy can be coupled to and from the antenna rod 2 via the coil 4, capacitively and/or inductively, or by

capacitive and/or inductive coupling means, e.g. arranged in or on the base member 6.

For the mounting of the antenna device, the lower region of the casing 5 or cover 3 may comprise a threaded portion for threaded engagement with a portable piece of communication equipment. Alternatively the casing 5 or cover 3 can be provided with means for snap in engagement with the portable piece of communication equipment. When the casing 5 is used for the physical mounting of the antenna device, the mounting parts can be used for the conductive connections, provided that they are made of conductive material, and the contact member 9 can be omitted.

Figure 5 shows a second embodiment of an antenna device 1 according to the invention. This embodiment differs from that of Figure 1 in that the enlarged portion 8 has a different shape. As seen in Figure 6 the enlarged portion 8 has a shape like a dogbone. It may be rotation symmetrical around a longitudinal axis 85, except for the bore 83, which is provided with an angle  $\alpha > 0^\circ$  in relation to the longitudinal axes 85. The enlarged portion 8 could also have planar surfaces parallel to the plane of the paper. The function and the advantages of the device of this embodiment are similar to that of the first embodiment and no further explanation is necessary.

Figure 7 shows a third embodiment of an antenna device 1 according to the invention. This embodiment differs from that of Figure 1 in that the enlarged portion 8 has a different shape. As seen in Figure 8 the enlarged portion 8 has a shape like a rod with rounded ends. It may be rotation symmetrical

around a longitudinal axis 85, except for the bore 83, which is provided with an angle  $\alpha > 0^\circ$  in relation to the longitudinal axes 85. The enlarged portion 8 could also have planar surfaces parallel to the plane of the paper. The function and the advantages of the device of this embodiment are similar to that of the first embodiment and no further explanation is necessary.

In Figure 9 a fourth embodiment of an antenna device 1 according to the invention is shown. In this embodiment two surfaces 81, 82 each including one contact surface are formed by bending the lower non-insulated portion of the radiating element 22. The surfaces 81, 82 are facing in different directions, preferably with a difference of  $180^\circ$ . The function and the advantages of the device of this embodiment are similar to that of the first embodiment and no further explanation is necessary.

In Figure 10 a fifth embodiment of an antenna device 1 according to the invention is shown. In this embodiment the coil 4 in the previous embodiments has been deleted and a radiating structure 41 has been inserted between the base member 6 and the cover 3. The radiating structure 41 comprises, as shown in Figure 11, a conductive pattern arranged on a flexible support, which during manufacturing is secured to the base member 6 before the mounting of the cover 3. The radiating structure 41 is connected to the transceiver circuits of the radio communication device via the feed point 42. The radiating pattern shown includes two meandering elements, even if other types of radiating patterns could be used. The antenna rod 2 and the casing 5 provided in this embodiment could be of any of the above described kinds.

By the arrangement of three contact surfaces for creating a bending force in the antenna rod 2 it is achieved that the bending force, the sliding resistance and the retaining force  
5 (in extended position) are simple to predetermine. Further, the tolerance demands for the enlarged portion 8 or the curved portion of the radiating element 22 are lower than for corresponding components in prior art means. This results in simpler manufacturing with less rejection.

10

Although the invention is described by means of the above examples, naturally, many variations are possible within the scope of the invention. It is for example possible to arrange the enlarged portion 8 as two separate parts, e.g. as two  
15 balls having non-concentric bores, and being fixedly secured to the radiating element in suitable rotational orientations.

Further the described elongated antenna element could be the outer telescope section of a telescope antenna.

20

According to a sixth embodiment of the invention the extendible antenna rod is non-rotationally guided in its sliding movement through the casing. This makes it possible to control the deviation from perfect axial movement of the rod  
25 with respect to possible, slight bending in the extended position, so that the rod always bends in the same chosen direction. This is diagrammatically illustrated in fig 12, wherein the rod 2 and the guiding surfaces 32 of the casing each have non-circular cross section, in this case oval cross  
30 section.

It also provides the opportunity to further control the bending properties of the rod by using a radiating element

having the desired rigidity in the chosen direction. As a further example, the radiating element may have increased or reduced rigidity in one chosen plane coinciding with or deviating from the bending plane.

5

Fig 12 also shows the radiating element 22 being located displaced by the amount  $\Delta$  from the centre position of the extendible rod inside the insulating and protecting layer. This way of arranging the radiating element unsymmetrically inside the rod provides advantages with respect to manufacture also affecting the bending properties of the antenna rod 2.

10

## CLAIMS

1. An antenna device for transmitting and receiving RF signals from and to a radio communication device, comprising:

- 5     - an extendable elongated flexible antenna element having first and second ends, whereof the first end has a first end portion,
- a casing through which said antenna element is slidable between an extended position, where the first end portion is mechanically locked in the casing, and a retracted position,
- 10     - a first opening in a first end of the casing through which the first end portion of said antenna element can be introduced, and a second opening in a second end of the casing through which the antenna element is slidable,
- 15     the casing through which the antenna element is slidable, characterised in that
  - the first end portion is provided with first and second contact surfaces for engagement with an inner surface of the casing,
  - 20     - the first and second contact surfaces are axially separated in relation to a longitudinal axis of the elongated antenna element and facing in different directions,
  - a third contact surface is arranged for engagement with the elongated antenna element between the first end portion and the second end, and
  - 25     - the contact surfaces, the casing and the elongated antenna element are arranged so as to bend the elongated antenna element to create a spring force in the elongated antenna element in order to achieve said mechanical locking in the extended position.
  - 30

2. An antenna device according to claim 1, wherein



- the elongated antenna element, at the first end portion, exhibits first and second curved sections carrying said first and second contact surfaces, respectively.
- 5     3. An antenna device according to claim 1, wherein
- the elongated antenna element, at the first end portion, includes an enlarged portion on which said first and second contact surfaces are arranged.
- 10    4. An antenna device according to any of claims 1-3, wherein
- the first and second contact surfaces are facing in directions differing essentially 180° from each other in relation to a longitudinal axis of the elongated antenna element.
- 15
5. An antenna device according to any of claims 1-4, wherein
- the casing is essentially tubular and provided with a constriction at its second end.
- 20    6. An antenna device according to any of claims 1-5, wherein
- the third contact surface has an annular shape.
7. An antenna device according to claim 6, wherein
- the third contact surface is arranged in connection to an opening in a cover through which the elongated antenna element is slidable.
- 25
8. An antenna device according to any of claims 3-7, wherein
- the enlarged portion includes an elongated body having a bore for reception of a first end of a flexible elongated radiating element comprised in the elongated antenna element, and
- 30

- the elongated body is provided in regions of its both ends with protrusions facing in different directions.
9. An antenna device according to any of claims 3-7, wherein
- 5 - the enlarged portion includes an elongated body having a bore for reception of a first end of a flexible elongated radiating element comprised in the elongated antenna element, and
- a longitudinal axis of the bore defines an angle in
- 10 respect to a longitudinal axis of the elongated body.
10. An antenna device according to claim 9, wherein
- the elongated body is provided around a region at each of its both ends with an annular protrusion.
- 15
11. An antenna device according to any of claims 8-10, wherein
- each protrusion has a curved surface which includes one of said first and second contact surfaces.
- 20
12. An antenna device according to claim 11, wherein
- the curved surfaces are convex.
13. An antenna device according to any one of claims 1-12, wherein
- 25 - the casing is made of a conductive material and is connectable to transceiver circuits of the radio communication device,
- the first end portion includes a conductive material so that conductive contact can be established via at least
- 30 one of said first and second contact surfaces.
14. An antenna device according to any one of claims 1-13, wherein

- a second antenna element is arranged so that it at least partially surrounds the elongated antenna element.

15. An antenna device according to any of claims 1-14, wherein

- 5     - the casing is essentially tubular and provided with at least one planar wall portion, in a plane parallel with a longitudinal axes of the casing, and
- the first end portion has a surface for co-action with said planar wall portion, for guiding and preventing
- 10     rotation of the antenna element.

16. An antenna device according to any of claims 1-14, wherein

- the casing is essentially tubular and provided with two planar wall portions, being parallel and arranged in
- 15     planes parallel with a longitudinal axes of the casing, and
- the first end portion has surfaces for co-action with said planar wall portions, for guiding and preventing
- rotation of the antenna element.

20

17. An antenna device according to any of claims 3-16, wherein

- the elongated antenna element includes a flexible elongated radiating element, and
- the enlarged portion includes a rigid member, rigidly
- 25     secured to the radiating element, so that the spring action is carried out in the radiating element.

18. An antenna device according to any of the previous claims, wherein the antenna rod (2) is non-rotationally guided (22,

30     32, fig 11) in the casing.

19. An antenna device according to any of the previous claims, wherein the radiating element (22) is located unsymmetrically ( $\Delta$ ) inside the antenna rod (2).

- 5 20. A radio communication device, characterised in that it is provided with an antenna device according to any of claims 1-19.

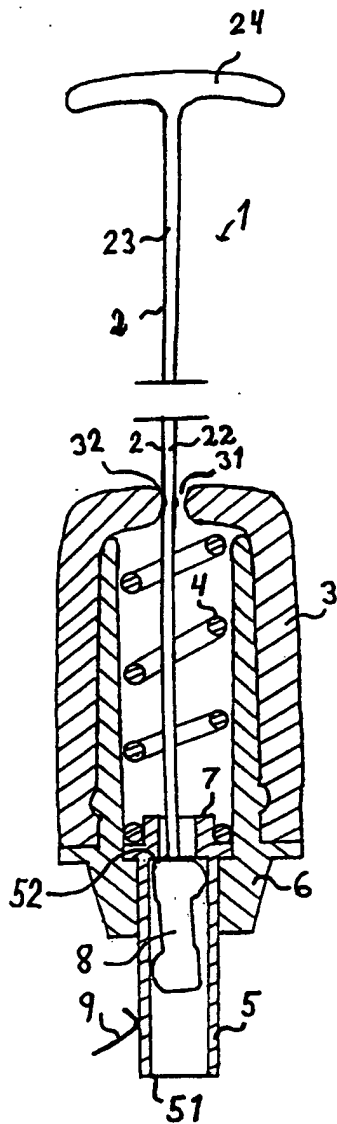


Fig. 1

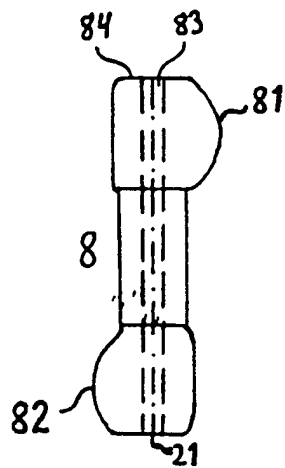


Fig. 2

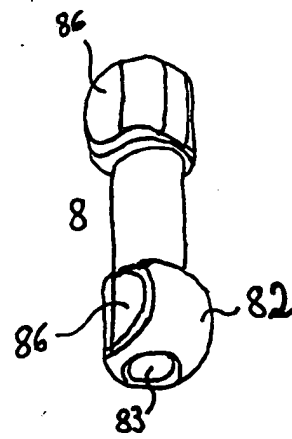


Fig. 3

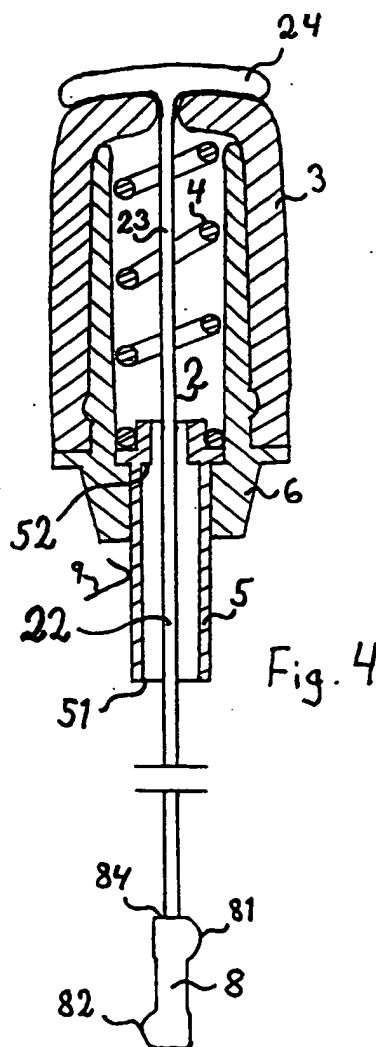


Fig. 4

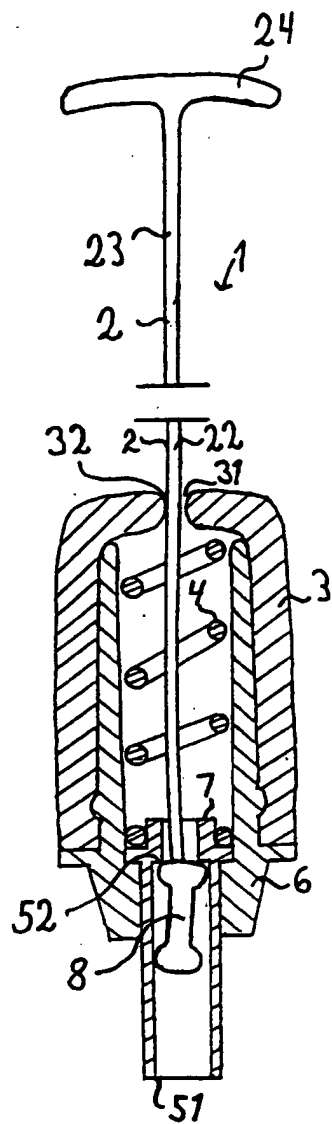


Fig. 5

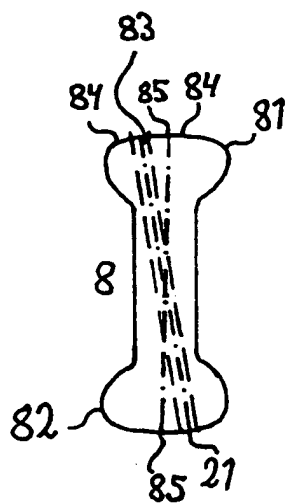


Fig. 6

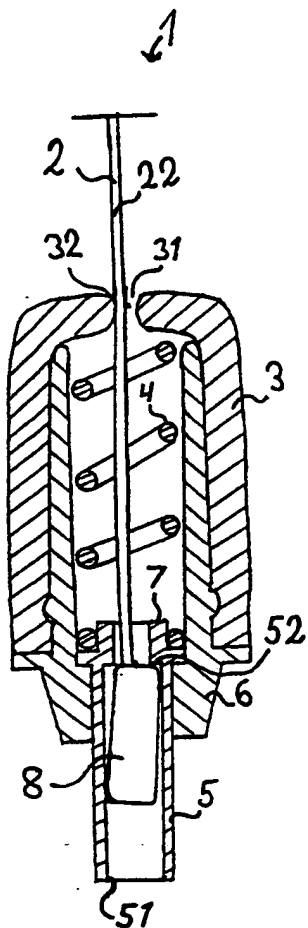


Fig. 7

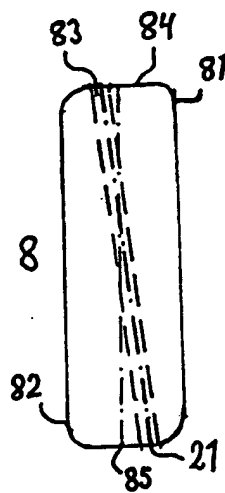


Fig. 8

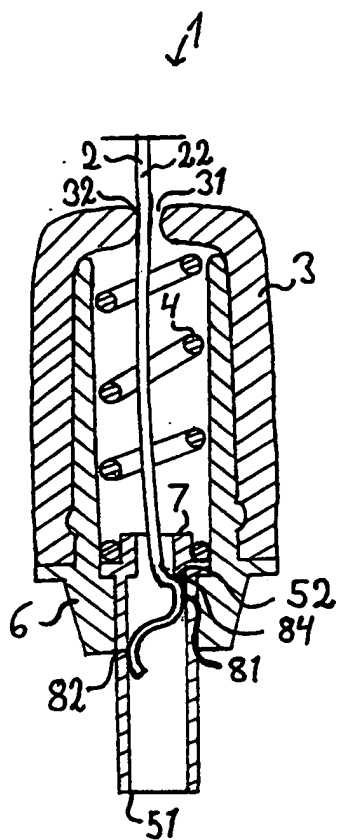


Fig. 9



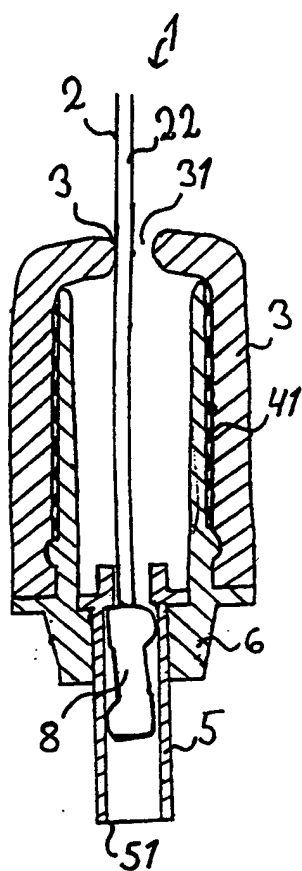


Fig. 10

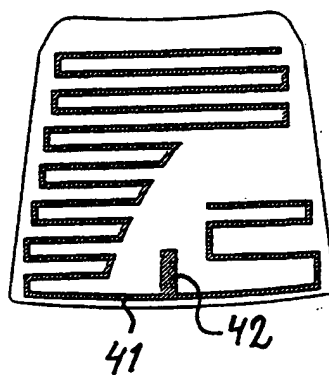


Fig. 11

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 99/01287

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H01Q 1/24, H01Q 1/10

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H01Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9428593 A1 (ALLGON AB), 8 December 1994 (08.12.94) --	1-18
A	WO 9723014 A1 (CENTURION INTERNATIONAL, INC.), 26 June 1997 (26.06.97) --	1-18
A	US 5605163 A (ROBERT HANI), 25 February 1997 (25.02.97) -- -----	1-18

☐ Further documents are listed in the continuation of Box C.
 ☒ See patent family annex.

\* Special categories of cited documents

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"Z" document member of the same patent family

Date of the actual completion of the international search

29 November 1999

Date of mailing of the international search report

06-12-1999

Name and mailing address of the ISA:

 Swedish Patent Office  
 Box 5055, S-102 42 STOCKHOLM  
 Facsimile No. +46 8 666 02 86

Authorized officer

Rune Bengtsson/MN

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT  
Information on patent family members

02/11/99

International application No.  
PCT/SE 99/01287

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9428593 A1	08/12/94	CN 1116012 A	31/01/96
		DE 722622 T	07/11/96
		EP 0722622 A	24/07/96
		JP 2764349 B	11/06/98
		JP 8503830 T	23/04/96
		SE 500331 C	06/06/94
		SE 9301761 A	06/06/94
		US 5661495 A	26/08/97
WO 9723014 A1	26/06/97	AU 1288297 A	14/07/97
		GB 2324658 A,B	28/10/98
		GB 9813214 D	00/00/00
		US 5717408 A	10/02/98
US 5605163 A	25/02/97	AT 143274 T	15/10/96
		AU 685595 B	22/01/98
		AU 1797795 A	23/11/95
		CA 2148329 A,C	12/11/95
		DE 69400616 D,T	06/02/97
		DK 689850 T	17/03/97
		EP 0689850 A,B	03/01/96
		SE 0689850 T3	
		ES 2094010 T	01/01/97
		JP 8038614 A	13/02/96
		US 5782776 A	21/07/98